

# Remote Control BD1210R

## Technical Parameters

Input and Output	
Output signal	RF(2.4GHz)
Working voltage	3 VDC (CR2032)
Working current	<5mA
Standby current	<10μA
Standby time	1 year
Remote distance	30m

## Features

- Rotate knob to change brightness, support long press or twice click operation.
- One BD1210 accept up to 10 BD1210R.
- Each remote can pair with one or more receiver
- CR2032 battery powered.

FC  CE  RoHS  EMC  RED

20200508


BD1210R



Step-less dimming, Wireless remote control,  
Auto-transmitting, Synchronize/Push Dim

Safety and EMC	
EMC standard (EMC)	EN301 489, EN 62479
Safety standard(LVD)	EN60950
Radio Equipment(RED)	EN300 328
Certification	CE, EMC, LVD, RED

Environment	
Operation temperature	-30°C ~ +55°C
IP rating	IP20

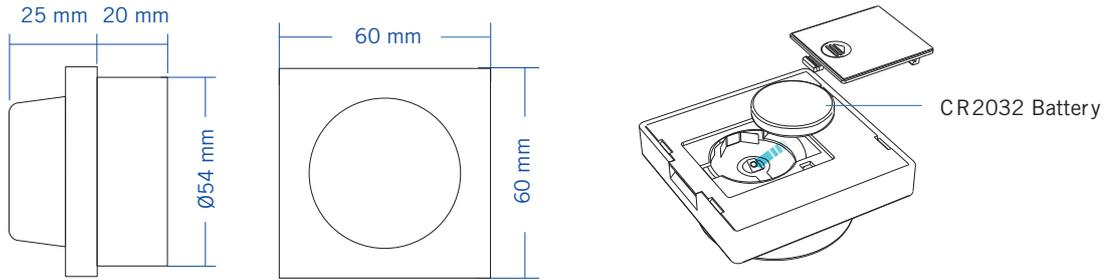

## Remote Control BD1210R

### Pair:

Short press Pair key on BD1210, immediately press on/off key on rotor remote BD1210R or zone key on the remote control BD1210R8 .

### Delete:

Press and hold pair key for 5s to delete all pairing, The light blinks 5 times means all paired remotes were deleted.

### Control:

- Short press: Turn on or off light
- Long press: Press and hold do step-less dimming. With every other long press, the light level goes to the opposite direction.
- Turn: Turn clockwise to dimm up, turn anticlockwise to dimm down